


CL-S6621 PEELER INSTALLATION GUIDE
FOR SERVICE REPRESENTATIVES


⚠ Caution

This document is intended for use by service representatives. Installation of the peeler will be performed by a service representative, so please contact your supplier for assistance.

- 1 Check to make sure that the printer's power switch is turned off, then disconnect the power cord.
- 2 Open the top cover.

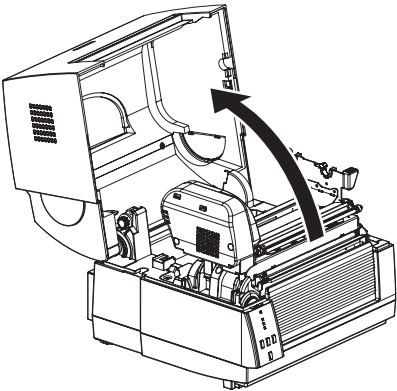


- 3 Lift and remove the front cover from the printer.
- Note** Keep the removed cover in a safe place, because it is used when the auto cutter has been removed.

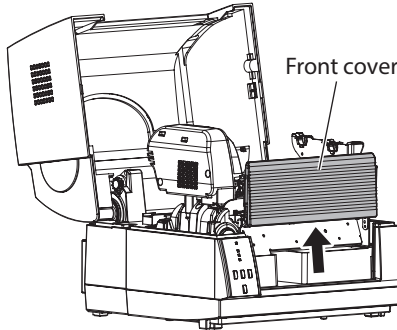


- 4 Remove the screw (1) fastening the cable cover, and push down the section indicated by the arrow (1). While holding the section down, push inward (toward the rear of the machine) to release (2), and then lift and remove the cable cover (3). Take care that the screw does not fall inside the printer chassis.


↓ Continued below

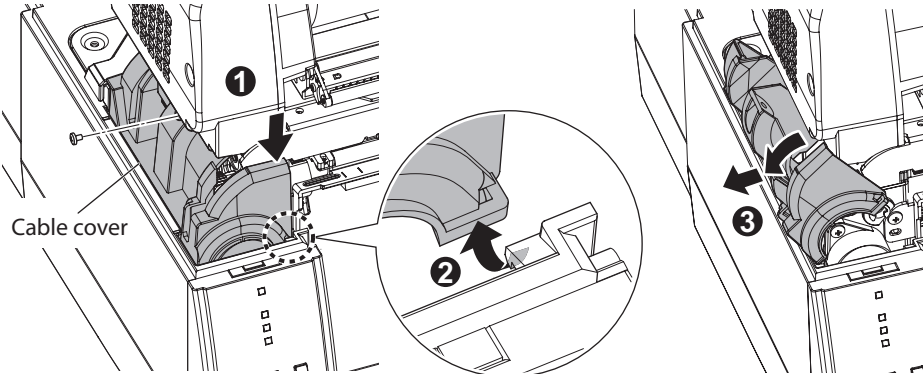


- 5 Remove the screw (1) fastening the optional unit connector cover, and then remove the optional unit connector cover.

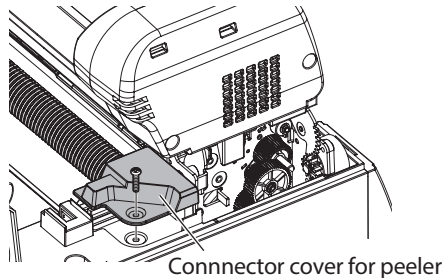


- 6 Remove the screws (2) holding the peel plate in place and then remove the peel plate. (1)
- 7 Attach the dedicated front cover for the peeler. (2)

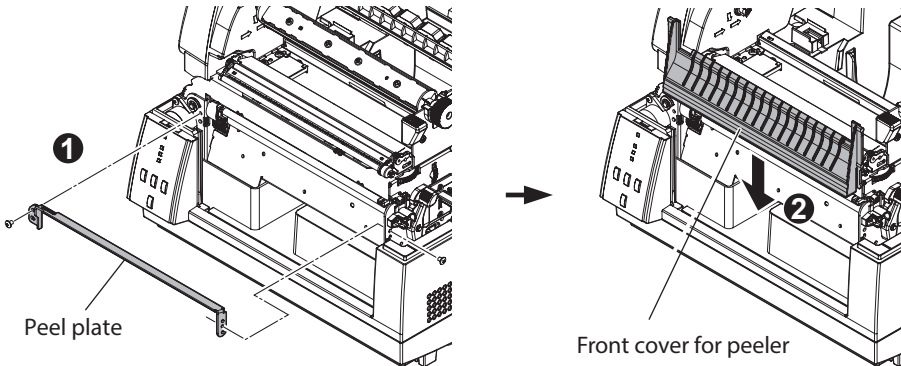


- 8 Attach the peeler unit to the printer.
- 1 Slide the release knob on the peeler unit to the left to open the unit.
- 2 Line up the pins (2) on the back of the peeler unit with the boss holes on the printer, and fasten them in place with screws (4).
- Use the included screws (2) and the screws (2) used to hold the peeler plate in place for the screws (4).

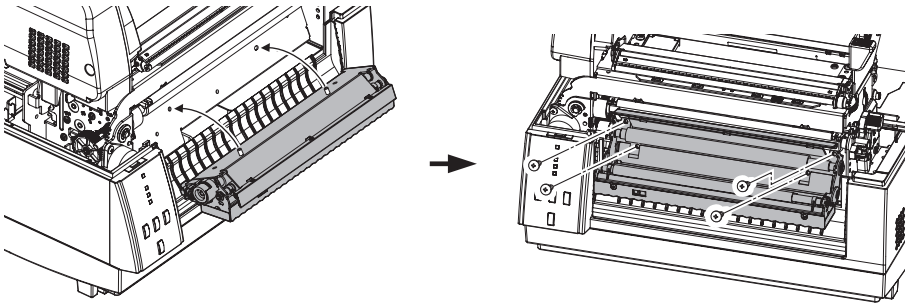

- 9 Plug the connector of the peeler unit cable into the optional connector on the printer.

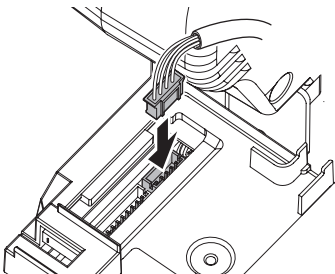


- 10 Feed the cable, in 9, so that it lies along the printer's case. When replacing the connector cover and the cable cover, take care that the covers do not pinch the cable.

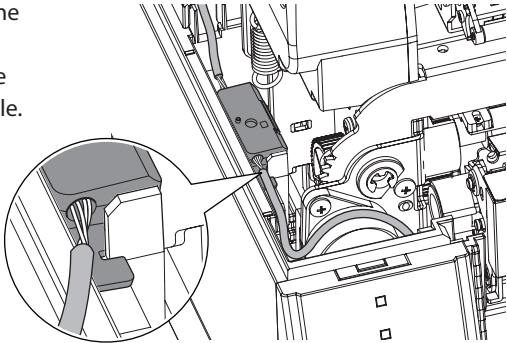

↓ Continued below

- 11 After the peeler unit is installed, reinstall the cable cover and the optional unit connector cover on the printer. To reinstall the cable cover and connector cover, follow the removal steps in reverse order.
- Note** Be very careful as the motor may be hot.

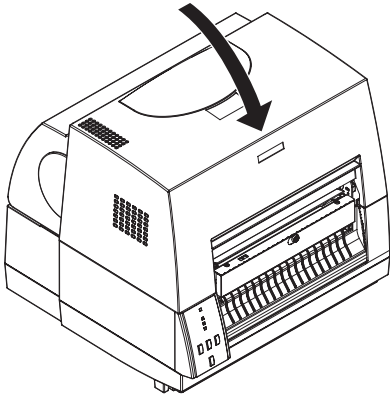

- 12 Close the top cover.
- 13 Connect the power cord and turn on the power switch of the printer. If the adjustment of the peel sensor is inadequate, multiple labels may be ejected at one time. Refer to the User's Manual for details on how to adjust the peel sensor.

Note Removing the peeler unit

To remove the peeler unit from the printer, follow the installation steps in reverse order. If the screws that fasten the peeler unit are removed, the unit may fall from the printer, so hold the peeler unit with your hand while loosening the fastening screws.

CITIZEN SYSTEMS AMERICA CORPORATION
1411 West 190th Street, Suite 675
Gardena, CA 90248
Tel: (310) 781-1460
Fax: (310) 781-9152
<http://www.citizen-systems.com>

CITIZEN SYSTEMS EUROPE GmbH
Otto-Hirsch-Brücken 17
70329 Stuttgart
Germany
Tel: +49 (0) 711 49032-0
Fax: +49 (0) 711 49032-45
<http://www.citizen-europe.com>
Elizabeth House, 56-60 London Road
Staines-Upon-Thames, TW18 4HF
United Kingdom
Tel: +44 (0) 20 8893 1900
Fax: +44 (0) 20 8893 0080

CITIZEN SYSTEMS JAPAN CO., LTD.
6-1-12, Tanashi-cho, Nishi-Tokyo-shi
Tokyo, 188-8511, Japan
Tel: +81 (0) 42 468 4608
Fax: +81 (0) 42 468 4687
<http://www.citizen-systems.co.jp>

CITIZEN is a registered trademark of CITIZEN WATCH CO., Japan.
CITIZEN es una marca registrada de CITIZEN WATCH CO., Japón.
Copyright © 2016 by CITIZEN SYSTEMS JAPAN CO., LTD.

出版日期: 2022年12月27日 Printed in China

PXZ00087-11
PMC-1609