
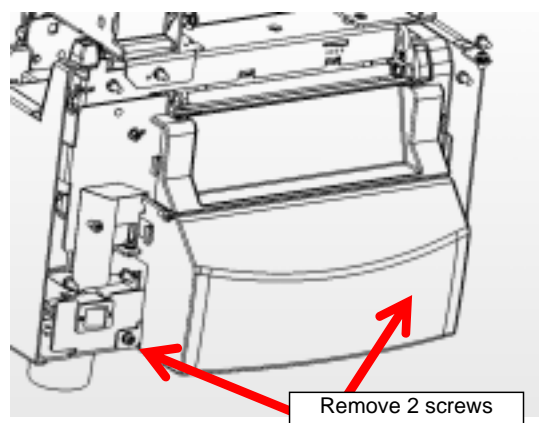
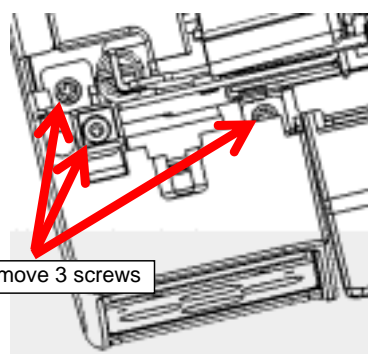
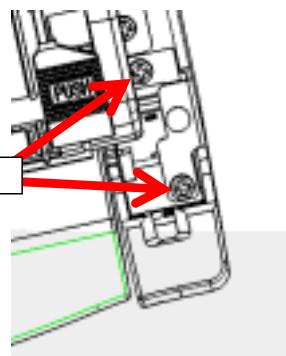



CL-S700 INSTALLATION MANUAL for OPTION PEELER

**[CAUTION when using the option peeler]
Print speed must be set to 7IPS or below**


- 1 . Remove the front 3 parts. Remove the 2 parts in the both side first, then remove the part in center.

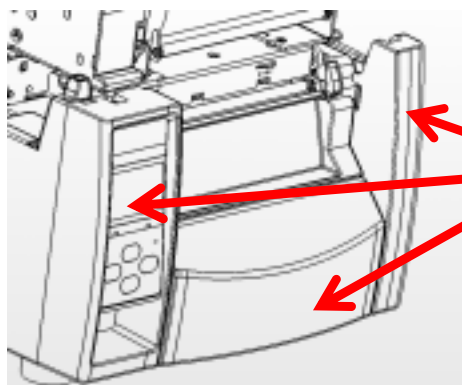


2 . "Plastic cover" on the part removed from the center must be changed to "Metal guide frame"

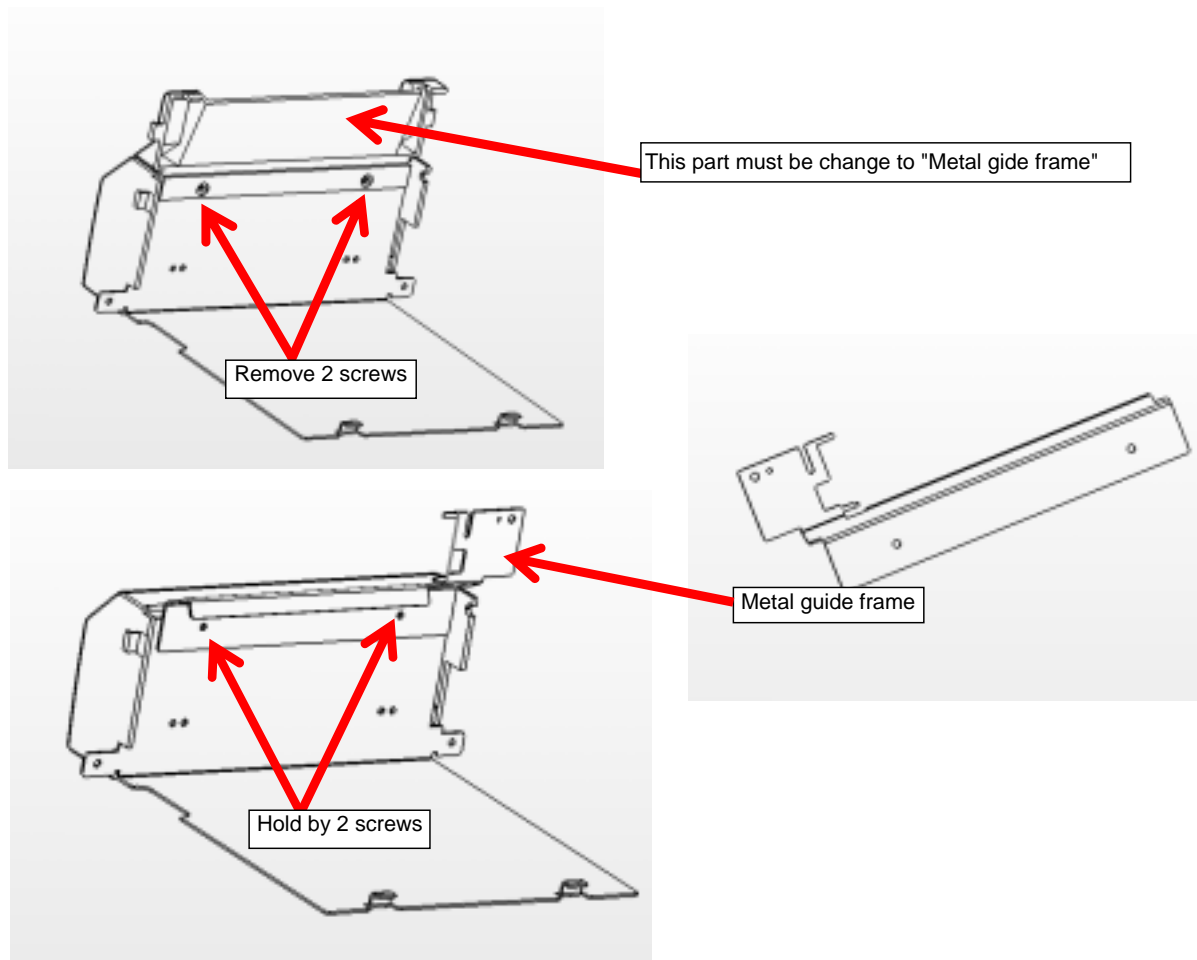

3 . Install the peeler itself by using 1 long screw

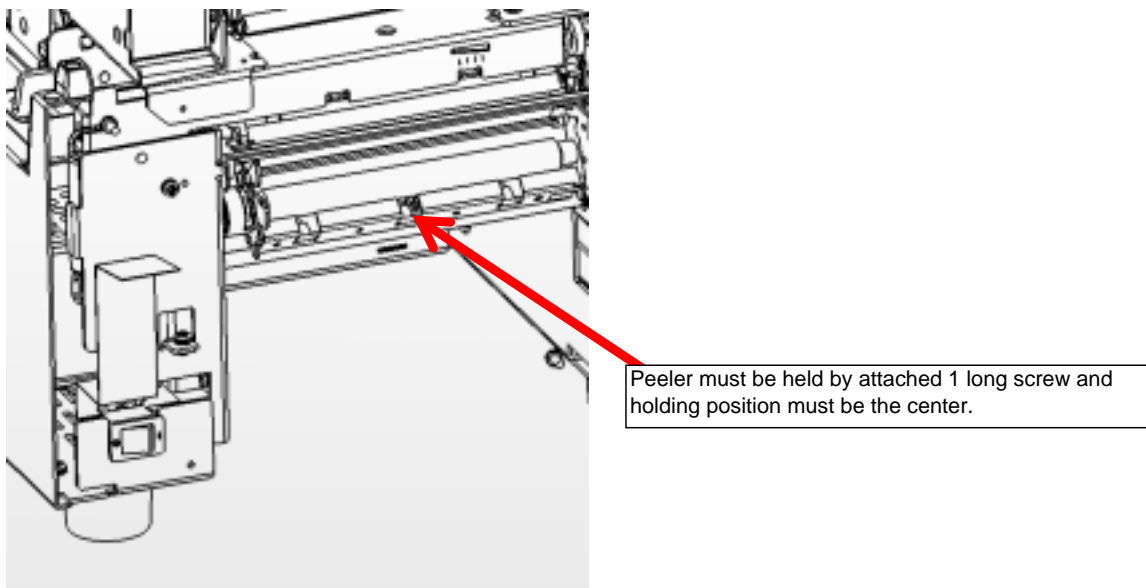

4 . Install the center part to the original position

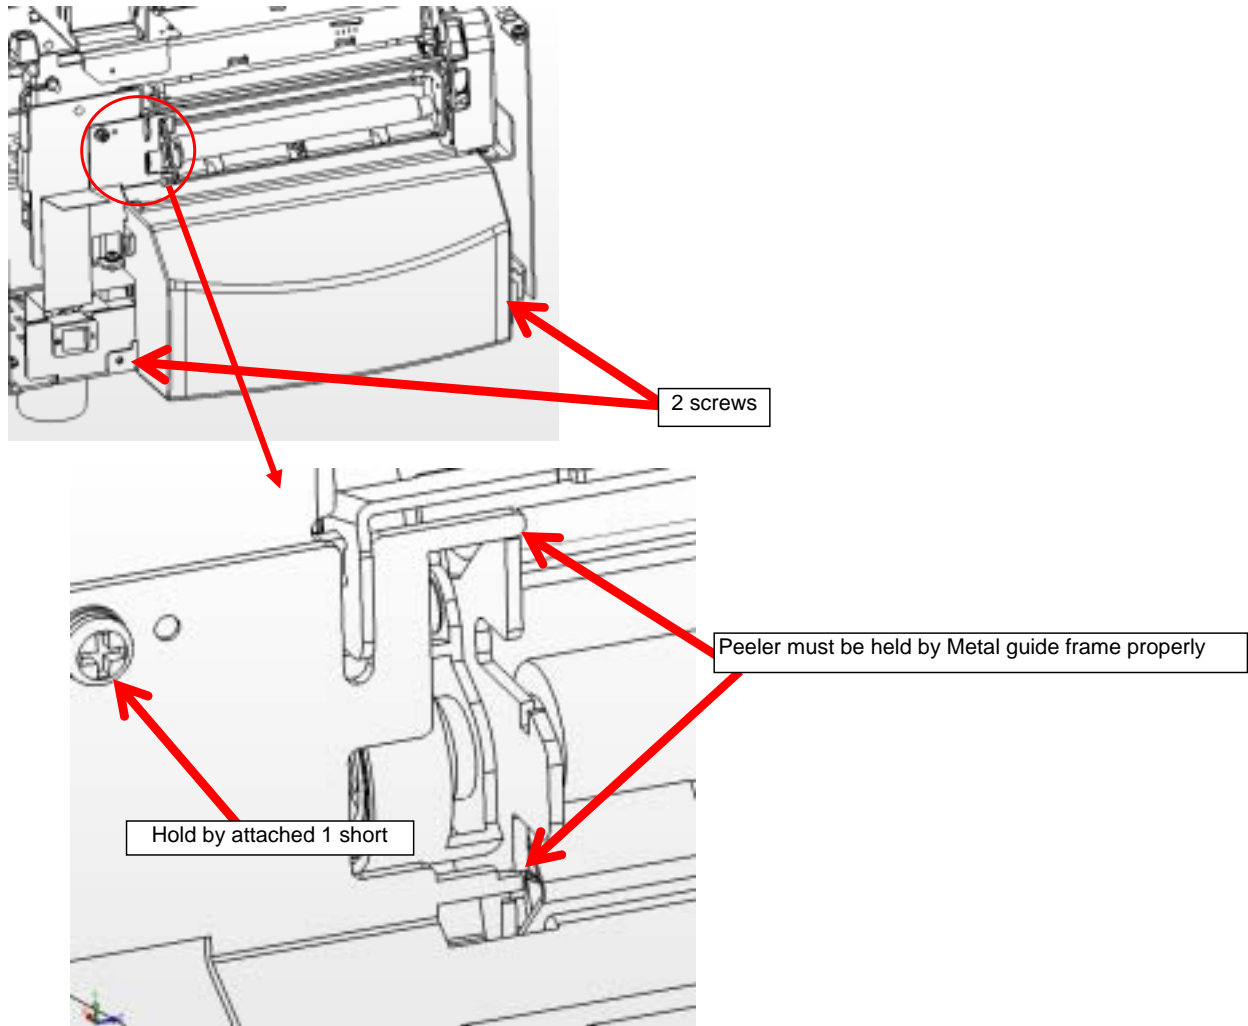

5 . Install the 2 parts in the both side, then the installation of the peeler is completed

